

目录

440V DC

gR Φ14x51 10-40A-----	1
gR Φ22x58 25-100A-----	2

660V DC

gR Φ27x60 8-160A-----	3
-----------------------	---

700V DC

aR Φ14x51 6-50A-----	4
----------------------	---


1000V DC

gR Φ10x38 4-20A-----	5
gR Φ21x127 6-63A-----	6

1500V DC


gR Φ21x127 6-25A-----	7
-----------------------	---

额定电压	规格尺寸	额定电流	分断能力	保护特性	L/R
440V DC	Φ14x51	10-40A	30kA	gR	30ms
	Φ22x58	25-100A	30kA	gR	30ms
660V DC	Φ27x60	8-160A	30kA	gR	30ms
700V DC	Φ14x51	6-50A	50kA	aR	1ms
1000V DC	Φ10x38	4-20A	30kA	gR	≤1ms
	Φ21x127	6-63A	100kA	gR	20ms
1500V DC	Φ21x127	6-25A	30kA	gR	50ms

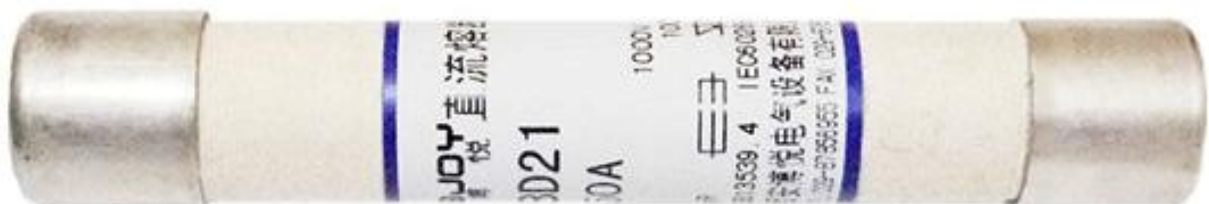


DC 440V 10-40A

Φ14x51	额定电流(A)	功耗(W)	弧前 $I^2t(A^2s)$	熔断 $I^2t(A^2s)$	订货型号
440V DC gR 30kA@DC 440V(L/R=30 ms)	10	2.5	4.0	25	BD14-10A/440V DC gR
	12	3.0	6.5	40	BD14-12A/440V DC gR
	16	4.8	8.0	55	BD14-16A/440V DC gR
	20	6.0	12.0	70	BD14-20A/440V DC gR
	25	7.5	20.0	130	BD14-25A/440V DC gR
	30	10.0	32.0	190	BD14-30A/440V DC gR
	32	10.5	72.0	430	BD14-32A/440V DC gR
	35	11.0	105.0	620	BD14-35A/440V DC gR
	40	12.5	130.0	770	BD14-40A/440V DC gR

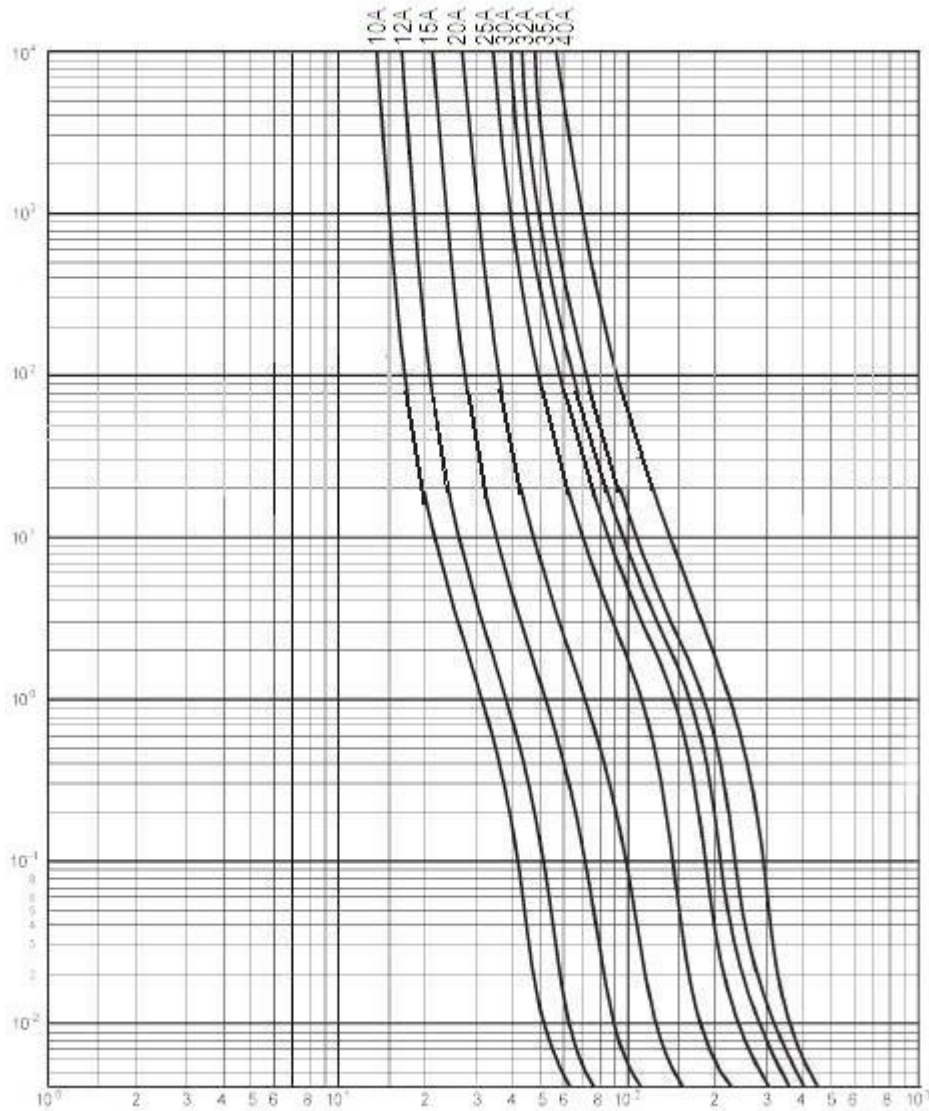


DC 440V 25-100A

Φ22x58	额定电流(A)	功耗(W)	弧前 $I^2t(A^2s)$	熔断 $I^2t(A^2s)$	订货型号
440V DC gR 30kA@DC 440V(L/R=30 ms)	25	3.6	100	800	BD22-25A/440V DC gR
	30	4.6	190	1500	BD22-30A/440V DC gR
	32	4.8	250	2000	BD22-32A/440V DC gR
	35	5.0	370	2900	BD22-35A/440V DC gR
	40	5.2	420	3300	BD22-40A/440V DC gR
	50	5.4	870	6800	BD22-50A/440V DC gR
	63	6.9	1300	10200	BD22-63A/440V DC gR
	80	7.5	2500	19500	BD22-80A/440V DC gR
	100	7.8	4600	35800	BD22-100A/440V DC gR

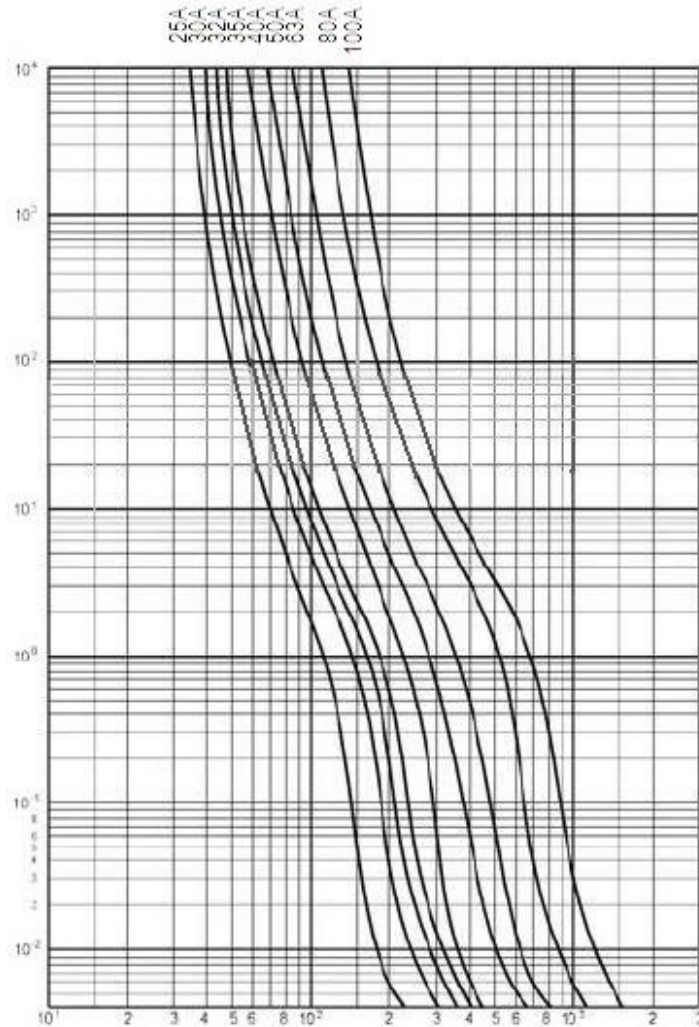


DC 660V/440V 8-160A

Φ27x60	额定电流(A)	功耗(W)	弧前 $I^2t(A^2s)$	熔断 $I^2t(A^2s)$	订货型号
660V/440V DC gR 30kA@DC 660V(L/R=30 ms) / 440V(L/R=30 ms)	8	2.0	4	20	BD27-8A/660V DC gR
	10	2.2	8	40	BD27-10A/660V DC gR
	12	2.7	12	60	BD27-12A/660V DC gR
	16	3.0	30	160	BD27-16A/660V DC gR
	20	3.5	60	310	BD27-20A/660V DC gR
	25	4.0	130	650	BD27-25A/660V DC gR
	32	4.5	250	1250	BD27-32A/660V DC gR
	40	6.5	420	2100	BD27-40A/660V DC gR
	50	7.5	620	3100	BD27-50A/660V DC gR
	63	9.0	1200	6000	BD27-63A/660V DC gR
	80	11.0	2100	10500	BD27-80A/660V DC gR
	100	13.5	3500	17500	BD27-100A/660V DC gR
	110	14.5	4600	23000	BD27-110A/660V DC gR
	125*	16.0	7800	29600	BD27-125A/440V DC gR
	160*	19.0	11800	45000	BD27-160A/440V DC gR

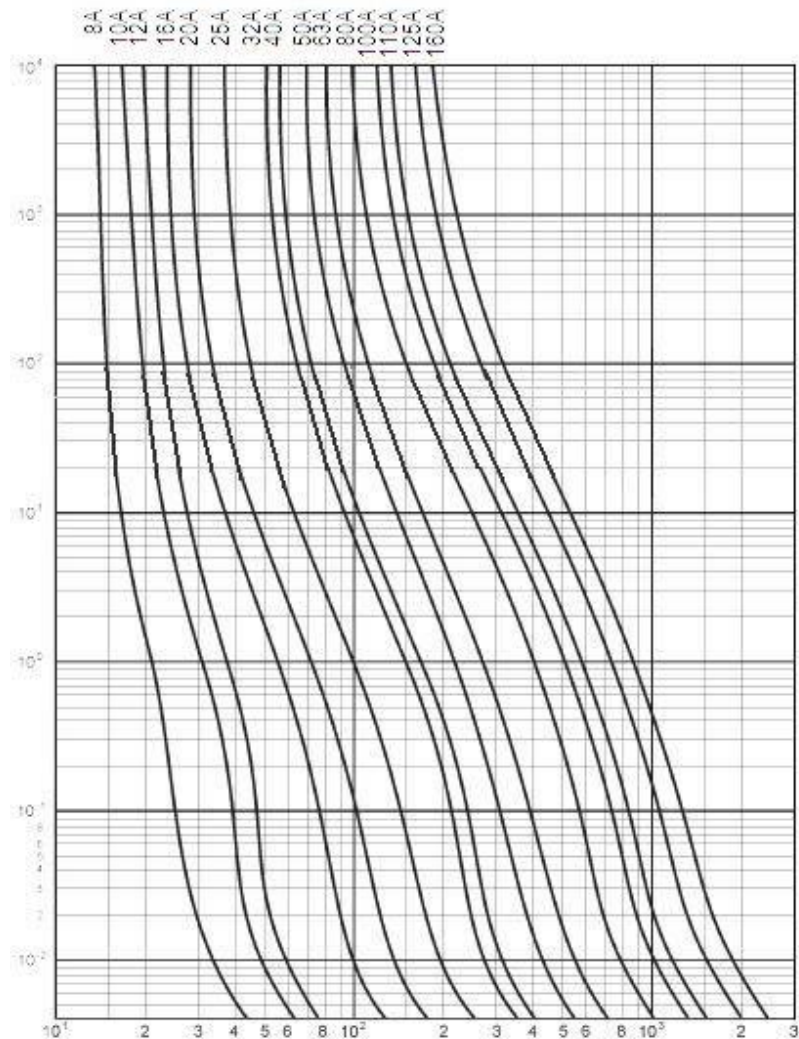


DC 700V 6-50A

Φ14x51	额定电流(A)	功耗(W)	弧前 $I^2t(A^2s)$	熔断 $I^2t(A^2s)$	订货型号
700V DC aR 50kA@DC 700V(L/R=1 ms)	6	1.5	2.0	12	BD14-6A/700V DC aR
	8	1.8	3.0	17	BD14-8A/700V DC aR
	10	2.5	4.0	25	BD14-10A/700V DC aR
	12	3.0	6.5	40	BD14-12A/700V DC aR
	16	4.8	8.0	55	BD14-16A/700V DC aR
	20	6.0	12.0	70	BD14-20A/700V DC aR
	25	7.5	20.0	130	BD14-25A/700V DC aR
	30	10.0	32.0	190	BD14-30A/700V DC aR
	35	10.5	72.0	430	BD14-35A/700V DC aR
	40	11.0	105.0	620	BD14-40A/700V DC aR
	50	12.5	130.0	770	BD14-50A/700V DC aR

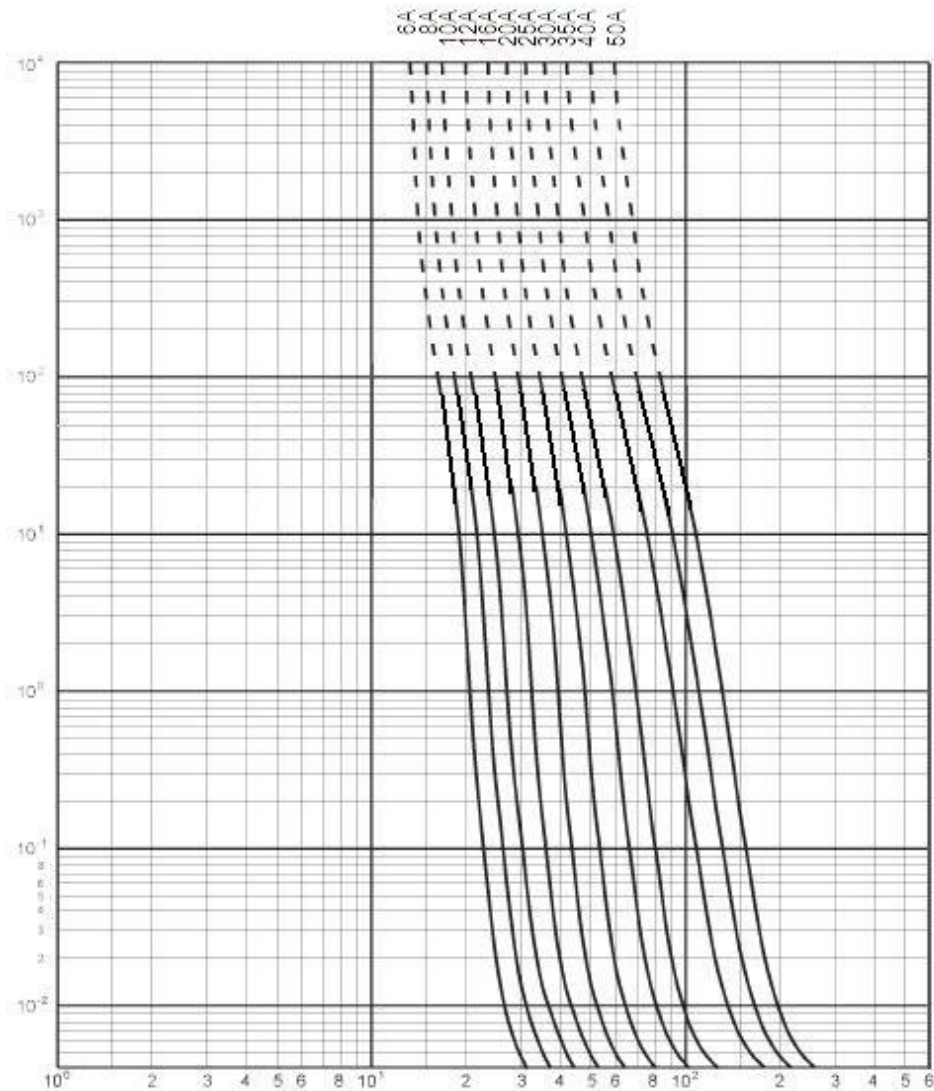


DC 1000V 4-20A

Φ10x38	额定电流(A)	功耗(W)	弧前 $I^2t(A^2s)$	熔断 $I^2t(A^2s)$	订货型号
1000V DC gR 30kA@DC 1000V(L/R≤1 ms)	4	0.5	3	25	BD10-4A/1000V DC gR
	6	0.7	5	40	BD10-6A/1000V DC gR
	8	1.0	7	55	BD10-8A/1000V DC gR
	10	1.5	10	80	BD10-10A/1000V DC gR
	12	1.6	20	160	BD10-12A/1000V DC gR
	16	2.0	30	230	BD10-16A/1000V DC gR
	20	2.5	52	400	BD10-20A/1000V DC gR

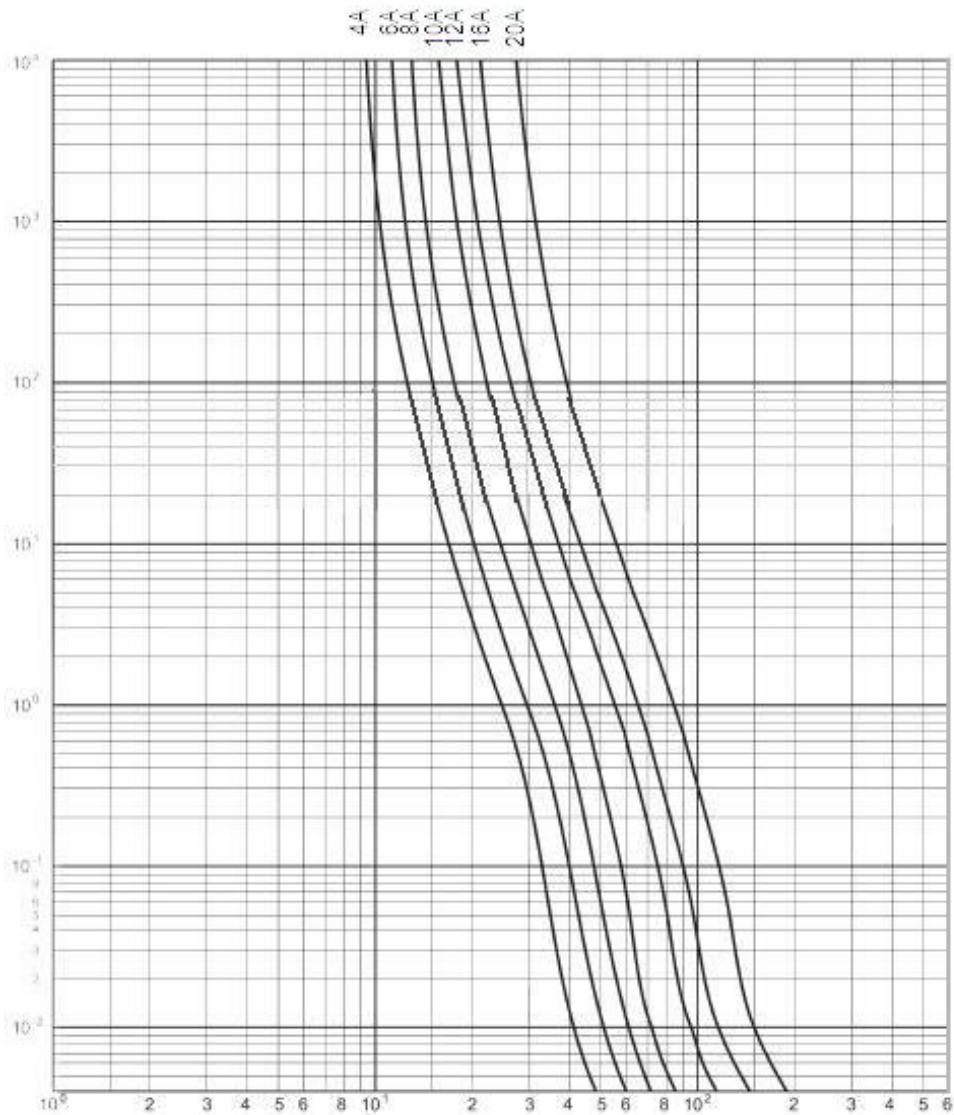

DC 1000V 6-63A

Φ21x127	额定电流(A)	功耗(W)	弧前 $I^2t(A^2s)$	熔断 $I^2t(A^2s)$	订货型号
1000V DC gR 100kA@DC 1000V(L/R=20 ms)	6	3.0	3	17	BD21-6A/1000V DC gR
	8	3.2	7	40	BD21-8A/1000V DC gR
	10	3.5	12	75	BD21-10A/1000V DC gR
	12	4.5	20	120	BD21-12A/1000V DC gR
	16	5.5	50	300	BD21-16A/1000V DC gR
	20	7.0	80	470	BD21-20A/1000V DC gR
	25	8.0	120	670	BD21-25A/1000V DC gR
	32	10.0	185	1050	BD21-32A/1000V DC gR
	40	12.0	470	2700	BD21-40A/1000V DC gR
	50	13.0	740	4200	BD21-50A/1000V DC gR
	63	17.5	1300	7500	BD21-63A/1000V DC gR

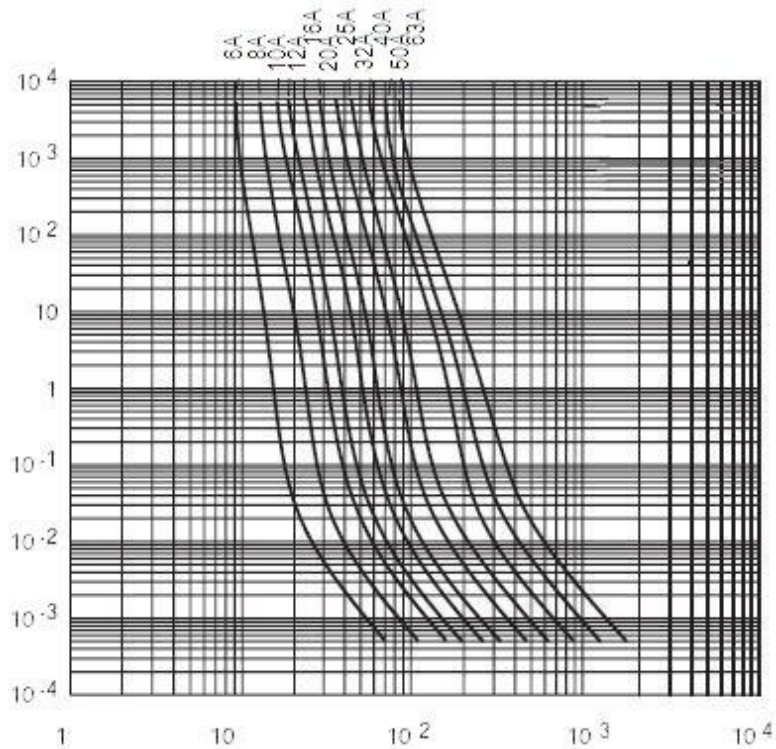

DC 1500V 6-25A

Φ21x127	额定电流(A)	功耗(W)	弧前 $I^2t(A^2s)$	熔断 $I^2t(A^2s)$	订货型号
1500V DC gR 30kA@DC 1500V(L/R=50 ms)	6	6.0	3.0	18	BD21-6A/1500V DC gR
	8	6.0	7.4	44	BD21-8A/1500V DC gR
	10	6.8	13.0	80	BD21-10A/1500V DC gR
	12	6.9	30.0	180	BD21-12A/1500V DC gR
	16	9.0	50.0	320	BD21-16A/1500V DC gR
	20	9.5	90.0	550	BD21-20A/1500V DC gR
	25	12.0	150.0	900	BD21-25A/1500V DC gR

